




ISO 9001 : 2015



Z-TORK Automation Co

Manufacturing Of Valve Automation, Pneumatic Product

☎ 079-22131972, 22121972 ☎ 9879791972, 9879461972



samrateng.2015@gmail.com



www.samratengineering.com



Office Address :
1, Marhaba Complex,
Kadiakui, Relief Road,
AHMEDABAD-380001. Gujarat

Factory : Plot No.2 ,Mansuri Estate,
Opp. New Aarvee Denim, Narol - Sarkhej Road,
Shahwadi, AHMEDABAD - 382405. Gujarat

ISO 9001 : 2015

Z-TORK Automation Co

Introduction Letter

We are pleased to introduce ourselves as manufacturer and supplier of Industrial Valves, Cocks and Fittings. We supply almost all types of quality valves for a wide spectrum of users in the Process and Chemical, Refineries and Petrochemical, Fertilizers, Drugs and Pharmaceuticals, Thermal Power Station, Nuclear and Atomic Power Station, Textiles, Dyes and Intermediates, Paints and Varnishes, Sugar, Breweries and Distilleries, Soaps and Detergents, Steel Plants, Food and Oil Industry, Solvent Extraction Plants, Sewage, Effluent and Water Treatment, Cooling Water Ship Yards and Marine Management, Water works, Pulp and Paper, LPG Bottling Plants, Onshore and Offshore Platforms, Slurry and Ash Handling.

Our unit is managed by a team of qualified persons with extensive experience in the field. From the modest beginning in 1996, we have made rapid strides in technology and statue, and are recognized by our esteemed customers as the most reliable single point source for their versatile requirements of Valves and Flange Fittings. Their sustained supports bears ample testimony for the confidence reposed in us.

Whether it be a well-planned project installations or contingent maintenance replacement, we at **Z TORK Automation Co.** gear ourselves up to our customers' requirements and supply within time. Marginal stocks of standard and ranges of Valves and Flange Fittings are available with us.

We use quality raw materials (Casting and Forging) from reputed foundries/forging shops, and we have statistical quality assurance with inspection at every stage of manufacturer to ensure sustained quality in our supplies. We have adequate capacity in terms of expertise and finance, and can undertake large volume of orders with committed deliveries.


Through rigid inspection resulting in dependability, reliability, trust worthiness without compromise, **Z TORK Automation Co.** aims at consistent quality and total customer satisfaction.

AT Z TORK Automation Co., YOU DO NOT HAVE TO PAY PREMIUM FOR THE QUALITY.

Now, with these few lines of our introduction, you are kindly requested to forward your valuable inquiries from time to time, which will enable us to participate.

We have enclosed our product catalogue for your kind perusal. If you need any further information/clarification, please do not hesitate to drop us a line, it will be furnished on priority.

Thanking and assuring you of our best attention and services at all time, we remain.

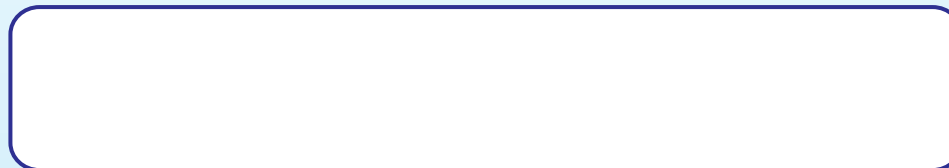



Power Plant



Oil Refineries
& Gas Plant



Water Treatment
& Filtration Plant



Chemicals &
Petrochemicals



Cement Plant



Boiler Plant



Steel & Power

Our Valuable Clients



IndianOil



SHAH MAKE 2/2 WAY PNEUMATICS ANGLE SEAT VALVES ON/OFF CONTROL VALVE "Y" TYPE CONTROL VALVES

MAKE	: SHAH
MODEL	: SYCV-S & SYCV-F
SIZE	: 1/2" TO 4" (15MM TO 100M)
BODY	: CF8/CF8M/WCB
MOC	: S.S.304 / S.S.316 / S.S.316L / WCB
SEAT	: PTFE
PORT	: 2 WAYS
TYPE	: NORMALLY CLOSE
PRESSURE	: UP TO 16 BAR
TEMPERATURE	: 250 C MAX
AIR PRESSURE	: 3.5 TO 7 BAR
ENDS	: SCREWED/FLANGED/TRICLOVER
MEDIA	: AIR WATER, OIL, GAS, STEAM



SHAH MAKE 2/2 WAY PNEUMATICS ANGLE SEAT VALVES SINGLE PIECE "Y" TYPE CONTROLS VALVES

MAKE	: SHAH
MODEL	: SYCV-F
SIZE	: 1/2" TO 4" (15MM TO 100M)
BODY	: CF8/CF8M
MOC	: S.S.304 / S.S.316 / WCB
SEAT	: PTFE
PORT	: 2 WAYS
TYPE	: NORMALLY CLOSE/NORMALLY OPEN
PRESSURE	: UP TO 16 BAR
TEMPERATURE	: 250 C MAX
AIR PRESSURE	: 2 TO 7 BAR
ENDS	: FLANGED
MEDIA	: AIR WATER, OIL, GAS, STEAM



SHAH MAKE THARMICFLUID CYLINDER CONTROLS VALVES 3 WAY CYLINDER CONTROLS VALVES

MAKE	: SHAH
MODEL	: STFV-F
SIZE	: 1" TO 4" (25MM TO 100M)
BODY	: WCB ASTM A 216 GR.
BONNET	: WCB ASTM A216 GR.
STEM	: AISI 304
PLUG	: AISI 304
GLAND BUSH	: CAST STEEL
GLAND PLATE	: M.S.
GLAND PKNG	: METALLIC WIRE REINFORCED GRAPHITED ASBESTOS HIGH TEMP;-800C
ACTUATOR	: SPRING RETURN CYLINDER ALUMINUM
TYPE	: NORMALLY CLOSE/NORMALLY OPEN
PRESSURE	: UPTO 16BAR
TEMPERATURE	: UPTO 550C MAX
AIR PRESSURE	: 4 TO 10 KG / Cm2
ENDS	: FLANGED
MEDIA	: HOT OIL, THARMIC FLUID & STEAM
DUTY	: ON-OFF TYPE



SHAH MAKE PNEUMATIC OPERATED KNIFE EDGE GATE VALVE

MAKE	: SHAH
BODY	: C,I,WCB CF 8, CF 8M, SGI
GATE	: AISI 304 AISI 316
SEAT	: METAL TO METAL (EPDM/VITON/PTFE/NITRILA)
PACKING	: PTFE IMPREG, SYNTH, FIBRE
GLAND FOLLOWER	: DUCTILE IRON CF, 8 CF8M, WCB
SOLINOID VALVE	: 5/2 WAY (240 V AC) (24 V DC)
LIMIT SWITCH	: PUSH BUTTON, PROXIMITY
YOKE	: CARBON STEEL
SEAT RING	: AISI 304 AISI 316
PNEUMATIC	: CYLINDER OPERATED
FASTNERS	: ZINC PLATED CARBON STEEL



SHAH MAKE DIAPHRAGM OPERATED CONTROLS VALVES 2 WAY & 3 WAY

MAKE	: SHAH
MODEL	: SDCV-F
SIZE	: 1" TO 4" (25MM TO 100M)
BODY	: WCB ASTM A 216 GR.
BONNET	: WCB ASTM A216 GR.
DIAPHRAGM	: CAST STEEL
STEM	: AISI 304
PLUG	: AISI 304
GLAND BUSH	: CAST STEEL
GLAND PLATE	: M.S.
GLAND PKNG	: METALLIC WIRE REINFORCED GRAPHITED ASBESTOS HIGH TEMP-800 C
TYPE	: NORMALLY CLOSE/NORMALLY OPEN
TEMPERATURE	: UP TO 550C MAX
AIR PRESSURE	: 1" TO 2"
ENDS	: FLANGED
MEDIA	: HOT OIL, THARMIC FLUID & STEAM



SHAH MAKE C.I. CYLINDER OPERATED CONTROLS VALVES 2 WAY & 3 WAY

MAKE	: SHAH
MODEL	: SCV-F
SIZE	: 1" TO 4" (25MM TO 100M)
BODY	: C.I
MATERIAL	: C.I
TRIM PART	: S.S. 410, S.S. 304
OPERATING PRES.	: 4.5 TO 7 BAR
WORKING PRES.	: 12 BAR MAX
TEMP.	: 180 C
MEDIA	: AIR, WATER, STEAM, ETC.



SHAH MAKE DIAPHRAGM OPERATED MODULATING TYPE ON/OFF CONTROLS VALVES ELECTRO PNEUMATICS POSITIONER 2 WAY & 3 WAY

MAKE	: SHAH
MODEL	: SDCV-F
SIZE	: 1" TO 4" (25MM TO 100M)
BODY	: WCB ASTM A 216 GR.
BONNET	: WCB ASTM A 216 GR.
DIAPHRAGM	: CAST STEEL
STEM	: AISI 304
PLUG	: AISI 304
GLAND BUSH	: CAST STEEL
GLAND PLATE	: M.S.
GLAND PKNG.	: METALLIC WIRE REINFORCED GRAPHITED

TYPE	: NORMALLY CLOSE/NORMALLY OPEN
TEMPERATURE	: UPTO 550 C MAX
AIR PRESSURE	: 1" TO 2"
ENDS	: FLANGED
MEDIA	: HOT OIL, THARMIC FLUID & STEAM

ELECTRO PNEUMATIC POSITIONER DESCRIPTION:

DESCRIPTION	: LINEAR
MODEL NO.	: SHAH - IP 67"
INPUT SIGNAL	: 4 TO 20 M AMP
OUTPUT FEEDBACK	: 4 TO 20 M AMP
SPILT RANGE	: 3 TO 15 PSI
IMPEDANCE	: 250 + 15 OHM
SUPPLY PRESSURE	: 1.4 TO 7 KG / Cm2 (20-100 PSI)
STROKE	: 90
AIR CONNECTION	: PT (NPT) 1/4"
GAUGE CONNECTION	: PT (NPT) 1/8"




SHAH MAKE MOTORIZED CONTROLS VALVES 2 WAY & 3 WAY

MAKE	: SHAH
MODEL	: SMV-F
SIZE	: 1" TO 4" (25MM TO 100M)
BODY	: WCB ASTM A216 GR.
BONNET	: WCB ASTM A216 GR.
ACTUTOR	: ALUMINUM
STEM	: AISI 304
PLUG	: AISI 304
GLAND BUSH	: CAST STEEL
GLAND PLATE	: M.S.
GLAND PKNG	: METALLIC WIRE REINFORCED GRAPHITED
TYPE	: NORMALLY CLOSE/NORMALLY OPEN
TEMPERATURE	: UP TO 550 C MAX
ENDS	: FLANGED
MEDIA	: HOT OIL, THARMIC FLUID & STEAM
DUTY	: ON-OFF TYPE



SHAH MAKE MOTORIZED BALL VALVES 2 WAY

MAKE	: SHAH
MODEL	: SOD-BASIC
APPROVALS	: DESIGN (TUV)
CHARACTERISTIC	: ON-OFF TYPE
TRAVEL	: 90 DEGREE
INDICATOR	: CONTINUOUS POSITION INDICATOR
PHASE	: SINGLE PHASE
SUPPLY	: 220V AC, 50 Hz
BODY MATERIAL	: ALUMINIUM ALLOY
AMBIENT TEMP	: 20-80 DEGREE C
MOTOR INSULATION	: CLASS F
PROTECTION CLASS	: IP 67 - WEATHER PROOF
LIMIT SWITCH	: 1 NO + 1 NC OUT PUT OF 220V AC
POSITION ON POWER FAIL	: STAY PUT
MANUAL OVERRIDE	: PROVIDED
BALL VALVE	: S.S.304/S.S.316/WCB
BALL	: S.S.304/S.S.316
STEM	: S.S.304/S.S.316
GLAND	: S.S.304/S.S.316/MS
SEAT	: PTFE
END	: SCREWED / FLANGED

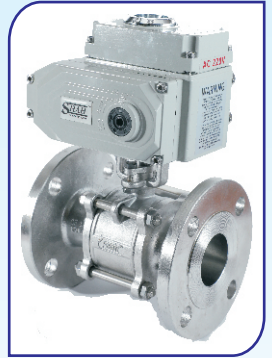


SHAH MAKE MOTORIZED BUTTERFLY VALVES

MAKE	: SHAH
MODEL	: JOD-BASIC
TRAVEL	: 90
INDICATOR	: CONTINUOUS POSITION INDICATOR
PHASE	: SINGLE PHASE
SUPPLY	: 220V AC, 50Hz
BODY MATERIAL	: ALUMINIUM ALLOY
AMBIENT TEMPERATURE	: 20 - 80 C
MOTOR INSULATION	: CLASS F
PROTECTION CLASS	: IP 67 - WEATHER PROOF
LIMIT SWITCH	: 1 NO + 1 NC OUT PUT OF 220V AC
POSITION ON POWER OUT	: STAY PUT
MANUAL OVERRIDE	: PROVIDED

BUTTERFLY VALVE

BODY	: C.I / S.S. / WCB
DISC	: ASTM A351 Gr. CF 8
STEAM	: AISI 410 / AISI 304
SEAT	: NITRILE / SILICON / TEFLON
ENDS	: WAFER TYPE TO SUIT ANSI B16.5 (150#)
VALVE RATING	: PN 10 / PN 16
BODY PRESS	: 225 Psig
SEAT PRESS	: 165 Psig
TEMPERATURE	: 80 C

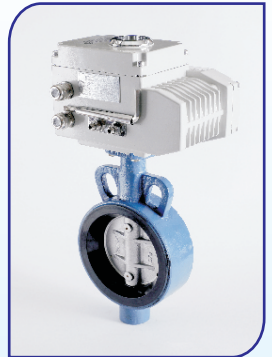

SHAH MAKE ACTUATOR BUTTERFLY VALVES

MAKE : SHAH
 MODEL : SBAV
 ACTUATOR : SINGLE/DOUBLE ACTING
 SIZE RANGE : 1.1/2" TO 24"
 BUTTERFLY VALVE : CAST IRON/CF8/CF8M
 DISC : C.I./CF8/CF8M
 SEALS : NITRILE/EPDM
 : (SILICON, TEFLON ON REQUEST)
 PRESSURE RATING : PN 10 (MAX)
 OPER. TEMP. RANGE : 25C TO 130C
 (DEPENDING ON M.O.C.)



SHAH MAKE PNEUMATIC ACTUATOR BALL VALVES

MAKE : SHAH
 MODEL : SABV
 ACTUATOR : SINGLE/DOUBLE ACTING
 SIZE RANGE : 1/2" TO 10"
 BALL VALVE : ONE, TWO & THREE PIECE DESIGN
 MOC : C.I./CF8/CF8M/C.S.
 ENDS : SCREWED/FLANGED
 SOCKET WELD/TRICOLVER



SHAH MAKE LOW PRESSURE SOLENOID VALVE

MAKE : SHAH
 MODEL : SLSV
 SIZE RANGE : 1/2" TO 2"
 BODY : CF8 / CF8M
 DIAPHRAGM : NEOPRENE/VITON/TEFLON
 PRESSURE : 0 TO 6 BAR
 TEMPERATURE : 5-85 C/140C
 (HIGH TEMP. ON REQUEST)
 ENDS : SCREWED/FLANGED/TRICLOVER
 MEDIA : AIR, HOT WATER, OIL, GAS, VACCUM
 AVAILABLE VOLT. : ALL STD. VOLTAGE AVAILABLE



SHAH MAKE 3/2-2/2 WAY DIRECT ACTING SOLENOID VALVE

MAKE : SHAH
 MODEL : SDASV
 TYPE : NORMALLY CLOSE/OPEN
 SIZE RANGE : 1/4" TO 1/2"
 BODY : S.STEEL
 PRESSURE : UPTO 70KG/CM2
 TEMPERATURE : UPTO 85C (HIGH TEMP. ON DEMAND)
 MEDIA : AIR, WATER, OIL, GAS & CHEMICAL
 AVAILABLE VOLT. : ALL STD. VOLTAGE AVAILABLE



SHAH MAKE 2 WAY DIAPHRAGM TYPE SOLENOID VALVE

MAKE : SHAH
 MODEL : SSDV
 ACTUATOR : DIAPHRAGM TYPE INT.PILOT OPERATED
 TYPE : NORMALLY CLOSE/OPEN
 SIZE RANGE : 1/2" TO 2"
 BODY : Cf8 / CF8M
 DIAPHRAGM : NEOPRENE/VITON/TEFLON
 PRESSURE : 0.5 TO 10 BAR
 TEMPERATURE : UPTO 85 C (HIGH TEMP. ON REQUEST)
 ENDS : SCREWED/FLANGED/TRICLOVER
 MEDIA : AIR, WATER, OIL, GAS, VACCUM, etc.
 AVAILABLE VOLT. : ALL STD. VOLTAGE AVAILABLE



SHAH MAKE LOW PRESSURE PISTON VALVE

MAKE : SHAH
 MODEL : SLPV
 SIZE RANGE : 1/2" TO 1"
 BODY : CF8 / CF8M
 PISTON : S.S.410
 SEAL : SILICON
 PRESSURE : 8 PSI TO 180 PSI/280 PSI/1500 PSI
 TEMPERATURE : 5C TO 85C
 MEDIA : STEAM/HOT WATER/
 HIGH TEMP. FLUIDS
 AVAILABLE VOLT. : ALL STD. VOLTAGE AVAILABLE
 APPLICATION : WATER, COLD DRINK, CUNNA PASTE



SHAH MAKE PNEUMATIC ACTUATOR OPERATED S.STEEL TRICLOVER BALL VALVE

BODY	: S.S.304, S.S.316, S.S.316L
BALL	: S.S.304, S.S.316, S.S.316L
SEAL	: PTFE
PRESSURE	: 0 TO 10 KG./ CM2
TEMPERATURE	: 180 C
SIZE	: 15MM TO 50MM



SHAH MAKE PNEUMATIC ACTUATOR OPERATED S.STEEL SANDWICH TYPE BUTTERFLY VALVE

BODY	: S.S.304, S.S.316, S.S.316L
DISC	: S.S.304, S.S.316, S.S.316L
SEAT	: FOOD GRADED SILICON
PRESSURE	: MAX. 3 TO 4 KG, / CM2
TEMPERATURE	: 120 C
SIZE	: 50MM TO 300MM



SHAH MAKE PNEUMATIC ACTUATOR OPERATED S.STEEL TRICLOVER BUTTERFLY VALVE

SIZE	: 50MM TO 300MM
BODY	: S.S.304, S.S.316, S.S.316L
DISC	: S.S.304, S.S.316, S.S.316L
SEAT	: FOOD GRADED SILICON
PRESSURE	: MAX.3 TO 4 KG,/ CM2
TEMPERATURE	: 120 C



SHAH MAKE ELECTRO PNEUMATIC POSITIONER

MODEL NO.	: SYT 1000L
TYPE	: LINEAR TYPE ELECTRO POSITIONER




SHAH MAKE PNEUMATIC ACTUATOR BALL VALVES

MAKE	: SHAH
VALVE MODEL NO.	: SABV
TYPE	: LINEAR TYPE ELECTRO POSITIONER
ACTUATOR	: SINGLE/DOUBLE ACTING
SIZE RANGE	: 1/2" TO 10"
BALL VALVE	: ONE, TWO & THREE PIECE DESIGN
MOC	: C.I./CF8/CF8M/C.S.
ENDS	: SCREWED/FLANGED SOCKET WELD/TRICLOVER



SHAH MEK 3/2 & 5/2 NAMUR SINGLE/DOUBLE ACTING SOLENOID VALVE

MAKE	: SHAH
MODEL	: SSV
SELTIONAL AREA	: 16MM (CV=0.89)/14CM(CV=0.78)
WORKING PRESSURE	: 1.5 TO 8.0 KGF/CM
MAX. TEMPERATURE	: 5C TO 60C
VOLTAGE RANGE	: 230V AC, 110V AC, 24 VAC, 24V DC
ELE. CONSUMING	: AC380V:2.5 VA AC230V:2VA AC110V:2.5 VA AC24V:3W DC12V:2.5V
PROTECTIVE CLASS	: Ip65 (DIN40050)
MAX. ACTING FIRE.	: FIVE TIMES PER SECOND
SHORT EXCITATION TIME	: 0.05 SEC.

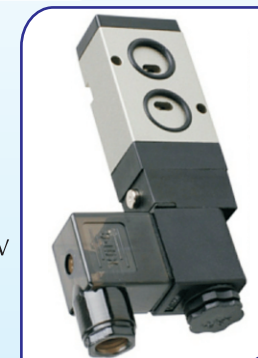

SHAH MAKE PNEUMATIC ROTARY ACTUATOR

MAKE	: SHAH
MODEL	: SEA-D, SEA-S
BODY	: ALUMINUM HARD ANODIZED
SHAFT (PINION)	: ALLOY STEEL
CAPS	: ALUMINUM PRESSURE DIE CAST
PISTON (RACKS)	: ALUMINUM PRESSURE DIE CAST
BOLTS/SCREW	: S.S.304
SEALING	: NITRITE
OPER. PRESS.	: 35 TO 150 PSI
TEMPERATURE	: -20°C TO 80°C



MOISTURE SEPARATORS

MODEL	: SMS
SIZE	: 1/4" TO 4" BSP / FLANGED
BODY	: M.STEEL / ALUMINIUM / S.S.
PRESSURE	: UPTO 10KG/CM2, 24KG/CM2
MEDIA	: AIR
DRAIN FACILITY	: MANUAL / AUTOMATIC WITH METAL BOWL



SHAH MAKE MOTORIZED ACTUATOR



MAKE	: SHAH
SIZE	: 30NM TO 3000NM
VOLTAGE	: 220AV, 24DC

SHAH Make Roto Seal Coupling (Right / Left Handed Thread)

Model	: SRC
Size	: 1/4" to 2" BSP
Body	: S.Steel / WCB
Shaft	: S.Steel
Pressure	: 10 Kg/cm2
Temp.	: 50 C



POSITION INDICATOR With MICRO LIMIT SWITCH BOX

TYPE	: MECHANICAL SWITCH / 2 SPDT (
PROTECTION GRADE	: IP 67 (1 NO + 1 NC) (2 NO + 2 NC)
VOLTAGE	: ALL STANDARD VOLTAGE AVAILABLE



AUTO DRAIN TIMER VALVE (ADJUSTABLE)

MODEL	: SADT
SIZE	: 1/2"
BODY	: S.S. 304 / BRASS
PRESSURE	: UPTO 10 KG/CM2
COIL	: ALL STANDARD VOLTAGE AVAILABLE
APPLICATION	: COMPRESSOR FILTER, DRYER, RECEIVER TANK, REFRIGERATION AFTER COOLER



SHAH MAKE DUST COLLECTOR SOLENOID PULSE VALVE

MAKE	: SHAH
MODEL	: SDCV
SIZE RANGE	: 1/2" TO 2"
BODY	: ALUMINIUM DIE CAST
DIAPHRAGM	: NEOPRENE/NITRILE/PU
PRESSURE	: 0.6 TO 10 BAR
TEMPERATURE	: 80C MAX (UPTO 125C ON REQUEST)
AVAILABLE VOLT.	: ALL STD. VOLTAGE AVAILABLE



INVESTMENT CASTING BALL VALVE

MAKE	: SHAH
MOC	: CF 8 / CF 8M
DESIGN	: SINGLE/DOUBLE/THREE PIECE
ENDS	: SCREWED/FLANGED 150 CLASS/ F TABLE E-TABLE
SIZE	: 1/8" TO 4"



SHAH MAKE HIGH PRESSURE BALL VALVE

MAKE	: SHAH
MODEL	: SHPBV
SIZE RANGE	: 1/4", 3/8", 1/2", 3/4" 1", 1 1/2" & 2" BSP/NPT
BODY	: FORGED S.S./CS.
PRESSURE	: 200 KG & 500KG/cm2
TEMPERATURE	: 80C
MEDIA	: AIR, WATER, OILD & GAS



SHAH MAKE HIGH PRESSURE NEEDLE VALVE

MAKE	: SHAH
MODEL	: SNV
SIZE RANGE	: 1/4", 3/8", 1/2" 3/4" 1", 1/2" & 2" BSP/NPT
BODY	: FORGED S.S.
PRESSURE	: 1000 PSI/5000 PSI/10000 PSI
TEMPERATURE	: 360C
MEDIA	: AIR, WATER, OILD & GAS



MANUAL BUTTERFLY VALVE

MAKE	: SHAH
MODEL	: SBVA
DESIGN	: SURESEAL/REPLACABLE RUBBER LINING
OPERATION	: LEVER/MANUAL GEAR
ENDS	: WAFER TYPE
SIZE	: 40MM TO 500MM
DESIGN	: OFFSET DIS
OPERATION	: LEVER/GEAR
ENDS	: WAFER TYPE/DOUBLE FLANGED/LUGGED TYPE
SIZE	: 350MM TO 1200 MM



SHAH MAKE GLOBE VALVE

MAKE	: SHAH
MODEL	: SGV
CAST CARBON STEEL/S. STEEL GUN METAL	
RATING	: PN 40/PN 64
SIZE RANGE	: 15MM TO 300MM
DESIGN	: BS 1873/DIN 3356
TEST STD.	: BS 6755
CAST IRON	
RATING	: PN 10/PN 16
SIZE RANGE	: 15MM TO 250MM



SHAH MAKE F+R+L SET

MAKE	: SHAH
MODEL	: SFRL
SIZE RANGE	: 1/4" & 1/2"
BODY	: ALUMINIUM PRESS DIE CAST
BOWL	: POLYCARBONATE WITH METAL GUN
ELEMENT	: 25 MICRON
OPER. PRESSURE	: UPTO 10KG / cm ²

SHAH MAKE REGULATOR

MAKE	: SHAH
MODEL	: SPR
SIZE RANGE	: 1/4", 1/2", 3/4", 1", 1/2" & 2" BSP/NPT
BODY	: ALUMINIUM PRESS DIE CAST
PRESSURE	: UPTO 10KG/cm ²
MEDIA	: AIR & GAS



SHAH MEK 3/2 & 5/2 SINGLE/DOUBLE ACTING SOLENOID VALVE

MAKE	: SHAH
MODEL	: SSV
SELTIONAL AREA	: 16MM (CV=0.89)/14CM(CV=0.78)
WORKING PRESSURE	: 1.5 TO 8.0 KGF/CM
MAX. TEMPERATURE	: 5C TO 60C
VOLTAGE RANGE	: 230V AC, 110V AC, 24 VAC, 24V DC
ELE. CONSUMING	: AC380V:2.5 VA AC230V:2VA
	: AC110V:2.5 VA AC24V:3W DC12V:2.5V
PROTECTIVE CLASS	: Ip65 (DIN40050)
MAX. ACTING FIRE.	: FIVE TIMES PER SECOND
SHORT EXCITATION TIME	: 0.05 SEC.



SHAH MAKE 3/2, 5/2 & 5/3 HAND LEVER VALVE/ FOOT PEDAL VALVE



MAKE	: SHAH
MODEL	: SHLV
SIZE RANGE	: 1/4" & 1/2" BSP/NPT
PRESSURE	: UPTO 10KG/CM ²
MEDIA	: AIR

SHAH MAKE DOUBLE ACTING PNEUMATIC CYLINDER

MAKE	: SHAH
MODEL	: SDC
BORE SIZE	: 32MM TO 100MM
STROKE	: 25MM TO 1000MM
END COVER	: ALUMINUM
BARREL	: ALUMINUM
SEAL	: PU
PISTON	: ALUMINUM
PISTON ROD	: EN 8/S.STEEL
PRESSURE	: 0.5 TO 10 BAR
TEMPERATURE	: 60C
MEDIA	: AIR & GAS



CUT-OFF PRESSURE SWITCH



MAKE : INDFOS / DANFOSS / MITFOSS / ORION /
JOHNSON SAGINOMIYA & AVAILABLE IN DIFFERENT SIZE

PRESSURE GAUGE



MAKE : SHAH
MODEL : SPR
RANGE : 0 TO 2000 KG.
M.O.C. : MILD STEEL/S.S.
CONNECTION : 1/8" TO 1/2" AND TRICLOVER

PU TUBING



AVAILABLE IN DIFFERENT SIZE & COLORS
2 MM - 16 MM

PUSH-IN FITTING



AVAILABLE IN DIFFERENT SIZE & TYPE

BRASS/S.S. FITTING



AVAILABLE IN DIFFERENT SIZE & TYPE

